

Overview

HPE ProLiant DL385 Gen10 Server

The HPE ProLiant DL385 Gen10 Server is redefining price/performance with the new math for virtualized compute. Powered by the latest AMD® EPYC® 7xx2 Series Processors, the HPE ProLiant DL385 Gen10 Server offers greater processing power and faster memory speeds up to 2933 MT/s. This 2P, 2U server has been designed with flexibility while delivering a high maximum core count and large memory footprint. Choose this purpose-built platform for virtualization.



HPE ProLiant DL385 Gen10 Server - Front View

SFF chassis with optional Universal Media bay with optical and 2 NVMe plus 16 NVMe shown

- | | | | |
|---|---|----|---|
| 1 | Quick removal access panel | 10 | UID button |
| 2 | Drive Bay 1. Optional Universal Media bay. 2 USB 2.0 and Display port standard shown (8 SFF bay or 6 SFF+2NVMe or 8NVMe optional) | 11 | iLO Front Service Port |
| 3 | Optional Optical drive. Requires Universal Media bay | 12 | USB 3.0 |
| 4 | Optional 2 SFF HDD, requires optional Universal Media bay | 13 | Serial label pull tag |
| 5 | Drive Bay 2. NVMe shown (8 SFF, 6SFF+2NVMe or 8 NVMe PCIe SSD optional) | 14 | Box 3 |
| 6 | Drive Bay 3. NVMe shown (8 SFF, 6SFF+2NVMe or 8 NVMe PCIe SSD optional) | 15 | Box 2 |
| 7 | Power On/Standby button and system power LED button | 16 | Box 1 |
| 8 | Health LED | 17 | Optional front display port (Via Universal Media Bay) |
| 9 | NIC status | 18 | Optional USB 2.0 (via Universal Media Bay) |

Overview




HPE ProLiant DL385 Gen10 Server - Front View

8LFF chassis with Universal media bay and optional 2SFF and optical drive shown

- | | | | |
|---|---|---|--|
| 1 | Unit ID button | 6 | iLO Front Service Port |
| 2 | Health LED | 7 | Serial label pull tag |
| 3 | NIC status | 8 | Optional optical drive shown (blank as standard) |
| 4 | Power On/Standby button and system power LED button | 9 | Optional 2 SFF Drive bay, 2 NVMe shown |
| 5 | Front display port | | |

Overview

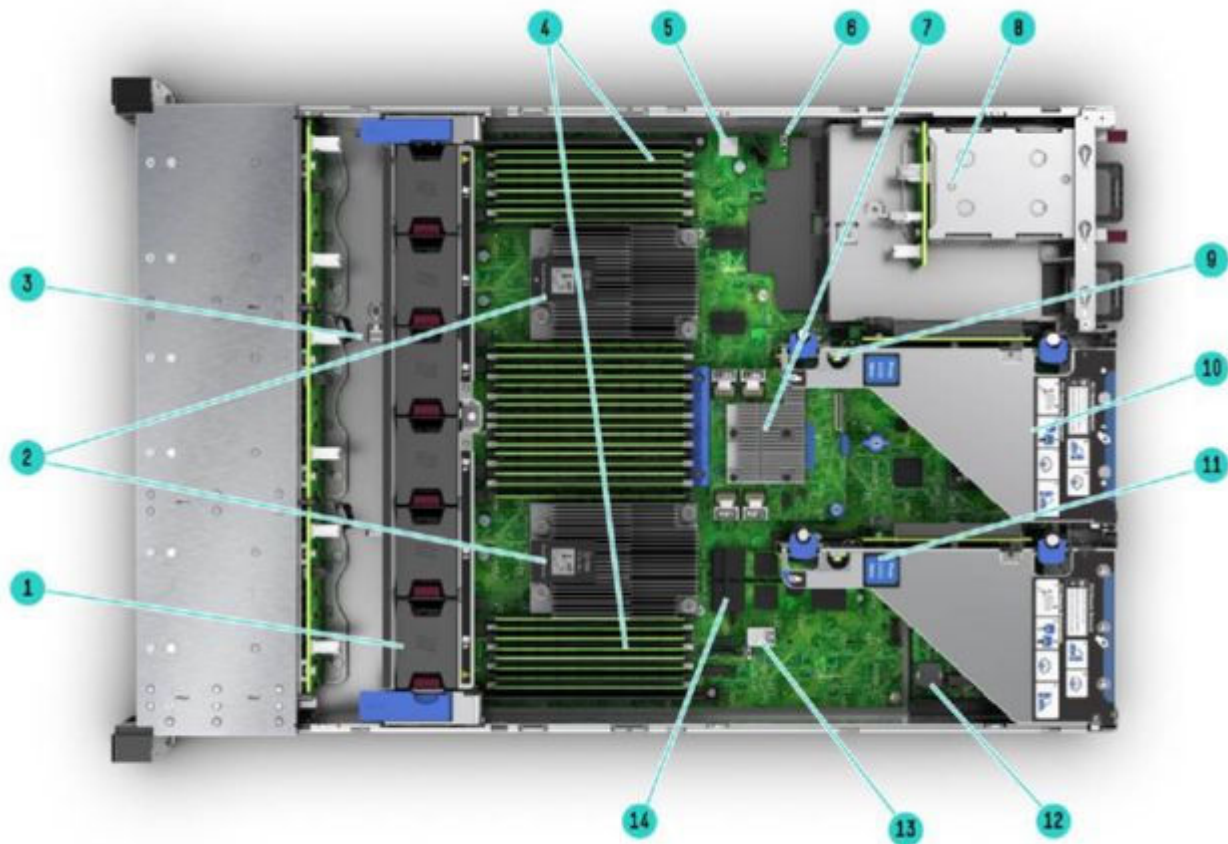


HPE ProLiant DL385 Gen10 Server - Internal View
8SFF chassis with optional 2nd CPU, FlexLOM, Smart array shown

- | | |
|---|--|
| 1. Fan cage shown with 6 standard Hot-plug fans
(High Performance fans optional) | 8 (Under) Hot Plug redundant HPE Flexible Slot Power supplies |
| 2. 2 Processors (heatsinks shown) | 9 Connection for second (optional) riser (Requires second CPU) |
| 3. Optional HPE Smart Storage Battery (not shown) | 10 **Embedded 4x1Gbe NIC (if equipped) |
| 4. DDR4 DIMM slots. Shown fully populated in 32 slots
(16 per processor) | 11 Primary PCIe riser, standard (Optional double wide GPU riser) |
| 5. MicroSD card slot (Optional Dual Micro-SD option) | 12 Optional Flexible LOM slot |
| 6. Chassis intrusion detection connector | 13 Internal USB 3.0 connector |
| 7. Optional HPE Flexible Smart Array Controller (P408i-a shown) | 14. Embedded M.2 connectors |

Notes: **Embedded 4x 1GbE Adapter is not equipped on new boards for 7xx2 series processors

Overview

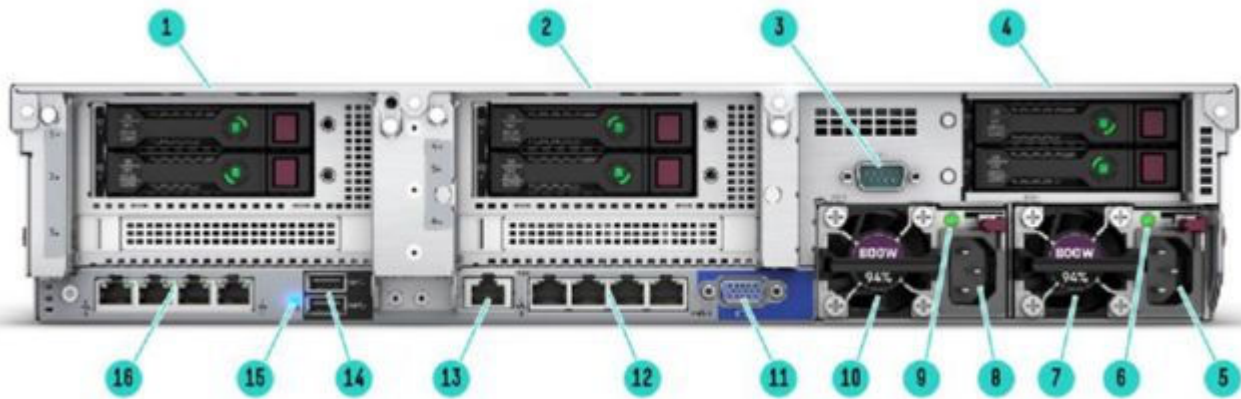

HPE ProLiant DL385 Gen10 Server - Rear View
With optional FlexLOM, Rear drives and Serial port shown

- | | | | |
|---|---|----|---|
| 1 | Primary Riser. PCI Slots (Slots 1-3 top to bottom, riser shipped standard, not shown)
Optional 2SFF rear drives | 9 | Power supply Power LED Bay 2 |
| 2 | Secondary Riser. PCI Slots (Slots 4-6 top to bottom, not shown, requires second riser card, and second processor). Optional 2 SFF rear drives | 10 | HPE Flexible Slot Power Supply Bay 2 |
| 3 | Optional serial port | 11 | VGA connector |
| 4 | Tertiary Riser (Slots 7-8 top to bottom, not shown). Optional rear 2 SFF HDD | 12 | **Embedded 4 x 1GbE Network Adapter(if equipped) |
| 5 | Power supply power connection. Bay 1 | 13 | Dedicated iLO management port |
| 6 | Power supply Power LED. Bay 1 | 14 | USB connectors 3.0 (2) |
| 7 | HPE Flexible Slot Power Supply. Bay 1 | 15 | Unit ID LED |
| 8 | Power supply Power connection Bay 2 | 16 | Optional FlexibleLOM ports (Shown: 4 x 1GbE) |

Notes: **Embedded 4x 1GbE Adapter is not equipped on new boards for 7xx2 series processors

What's New:

- New 2933 Memory DIMMs with capacity upto 128 GB
- New Disk Cartridge Options
- Supports the next generation AMD EPYC 7xx2 Series processor with double the core density compared to the previous generation and memory speeds up to 2933 MT/s.
- Embedded 4x 1GbE LOM is not supported with 7xx2 series processors
- Two new SMB Base SKU (BTO) offerings
- New SAS & SATA Solid State Drives
- New NVME Solid State Drives
- European Union (EU) Lot 9 regulation, please visit:
<https://www.hpe.com/us/en/about/environment/msds-specs-more.html> for more information

Overview

Platform Information

Form Factor

- 2U rack

Chassis Types

- 8 SFF with optional Universal Media Bay, and optional SFF or NVMe drive bay options
- 24 SFF bay with additional 6SFF rear drive bay option to total 30 SFF drives
- 8 LFF with Universal Media Bay
- 12 LFF with optional 4 LFF mid-plane and optional 3LFF + 2 SFF rear drive bay to total 19 LFF drives + 2 SFF drives

Notes:

- The 3 LFF rear drive box will consume space for the secondary and tertiary riser.
- The 8 and 12 LFF chassis also supports the 2 SFF rear drive box which allows for the user to attach a secondary or tertiary riser.
- The 8 NVMe drive option (826689-B21) can only be leveraged in the SFF chassis and replaces Box 1, 2 or 3.
- The Premium cage (826690-B21, 6 SAS/SATA+2 NVMe) can only be leveraged in the SFF chassis and replaces Box 1, 2 or 3.
- The Universal Media Bay (882097-B21) not available with the LFF chassis or the 24 SFF front end, and can only be populated in Box 1.
- The 8 SFF can be upgraded with additional 8SFF drive box to total 16 or 24 SFF drives. For optimal upgrade Box 2 should be populated second, with Box 1 the last to be populated for a field upgrade to 24 SFF. For CTO builds requiring 24 SFF please use the 24 SFF chassis (878613-B21). Note a field upgrade to 24 SFF will require a High Performance fan kit (867810-B21).
- The 8 LFF chassis cannot be upgraded to 12 LFF front in the field; however the 4-LFF Mid plane (882096-B21) is supported, but will also require a performance fan kit (867810-B21).
- CPU selection is limited 125W or lower with 4LFF midtray selected.
- The 8LFF chassis ships with 6-standard fans.
- All models come with the S100i Smart Array Controller with embedded software RAID support for the 2 embedded M.2 drive connectors on the system board.

System Fans

- Standard - fan types included

Notes:

- 1P models ship with 4 standard fans. The second processor option kit contains 2 additional fans.
 - The 12 LFF and 24 SFF chassis ship with 6 High performance fans as standard.
 - The 8LFF chassis ships with 6 standard fans as standard.
 - High performance fan kit is available to meet ambient temperature environments.
 - High performance fan kits are required for rear drives, Graphics (GPU) card, 180w Processors SKUs or NVMe configurations.
-

Standard Features

Processors

Up to 2 of the following depending on model.

Notes: For more information regarding AMD EPYC processors, please see the following:

<https://www.amd.com/en/products/epyc>

AMD® EPYC® 7xx2 Series Processor Family							
AMD EPYC Processor	Cores	Base Frequency	Max Frequency	Max Memory	Wattage	Cache	Memory
EPYC 7702	64	2.0Ghz	3.35Ghz	2TB	200	256MB	2933MT/S
EPYC 7552	48	2.2GHz	3.3GHz	2TB	200	192MB	2933MT/s
EPYC 7532	32	2.3GHz	3.2GHz	4TB	200	256MB	3200MT/s
EPYC 7502	32	2.5Ghz	3.35Ghz	2TB	180	128MB	2933MT/S
EPYC 7452	32	2.35Ghz	3.35Ghz	2TB	155	128MB	2933MT/S
EPYC 7402	24	2.8Ghz	3.35Ghz	2TB	180	128MB	2933MT/S
EPYC 7352	24	2.3GHz	3.2GHz	2TB	155	128MB	2933MT/s
EPYC 7302	16	3.0Ghz	3.3Ghz	2TB	155	128MB	2933MT/S
EPYC 7282	16	2.8GHz	3.2GHz	4TB	120	64MB	3200MT/s
EPYC 7272	12	2.9GHz	3.2GHz	4TB	120	64MB	3200MT/s
EPYC 7252	8	3.1GHz	3.2GHz	4TB	120	64MB	3200MT/s
EPYC 7262	8	3.2GHz	3.4GHz	2TB	155	128MB	2933MT/S

Notes: All AMD EPYC processors can support up to 2TB of memory each.

Chipset

No chipset - System on Chip (SoC) design.

On System Management Chipset

HPE iLO 5 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).

Memory

One of the following depending on model

Type	HPE DDR4 SmartMemory, Registered (RDIMM), Load Reduced (LRDIMM)	
DIMM Slots Available	32 16 DIMM slots per processor, 8 channels per processor, 2 DIMMs per channel	

With AMD® EPYC® 7xx2 Series Processor Family		
Maximum capacity (RDIMM)	2.0 TB	32 x 64 GB RDIMM @ 2933 MHz @1 DPC
Maximum capacity (LRDIMM)	4.0 TB	32 x 128 GB RDIMM @ 2933 MHz @1 DPC

Notes:

- The maximum memory speed is limited by the processor selection.
- Mixing of RDIMM and LRDIMM memory is not supported.
- When 2DIMMs are populated per channel, memory speed drops to 2666 MT/S

Standard Features

Expansion Slots

Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 3.0	X8	X8	Full-height,full-length slot	Proc 1
2	PCIe 3.0	X16	X16	Full-height,full-length slot	Proc 1
3	PCIe 3.0	X8	X8	Full-height,half-length slot	Proc 1

Notes: Bus Width Indicates the number of physical electrical lanes running to the connector.

Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 3.0	X8	X8	Full-height,full-length slot	Proc 2
2	PCIe 3.0	X16	X16	Full-height,full-length slot	Proc 2
3	PCIe 3.0	X8	X8	Full-height,half-length slot	Proc 2

Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 3.0	X8	X8	Full-height,full-length slot	Proc 2
2	PCIe 3.0	X8	X8	Full-height,full-length slot	Proc 2

Notes:

- Tertiary riser (other options available) can be leveraged without secondary riser.
- Bus width indicated the number of physical electrical lanes running to the connector.

Storage Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#). One of the following depending on model

Software RAID

- HPE Smart Array S100i SR Gen10 SW RAID

Notes:

- HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.
- HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled.
- The S100i supports the 2 M.2 system board connectors. .

Standard Features

Essential RAID Controller

- HPE Smart Array E208i-a SR Gen10 Controller
- HPE Smart Array E208i-p SR Gen10 Controller
- HPE Smart Array E208e-p SR Gen10 Controller

Performance RAID Controller

- HPE Smart Array P408i-a SR Gen10 Controller
- HPE Smart Array P408i-p SR Gen10 Controller
- HPE Smart Array P408e-p SR Gen10 Controller
- HPE Smart Array P816i-a SR Gen10 Controller
- HPE Smart Array P824i-p MR Gen10 Controller

Notes: Performance RAID Controllers require the HPE Smart Storage Battery (P01366-B21) which is sold separately.

Internal Storage Devices

One of the following depending on model

Optical Drive

- Ships standard in Performance Models
- Optional: DVD-ROM, DVD-RW

Hard Drives

- None ship standard

Maximum Internal Storage		
	Capacity	Configuration
Hot Plug SFF SAS	72.0 TB	24+6 x 2.4 TB* (with optional rear SFF drive cage)
Hot Plug SFF SATA	60.0 TB	24+6 x 2 TB (with optional SFF drive cage)
Hot Plug LFF SAS	296.6 TB	12+4+3 x 14 TB + 2 x 15.3 TB (with optional mid -tray and rear LFF drive cage, plus 2 SFF SSD rear)
Hot Plug LFF SATA	296.6 TB	12+4+3 x 12 TB + 2 x 15.3 TB (with optional mid -tray and rear LFF drive cage, plus 2 SFF SSD rear)
Hot Plug SFF SAS SSD	459 TB	24+6 x 15.3 TB (with optional rear SFF drive cage)
Hot Plug LFF SATA SSD	67.08 TB	12+4+3 x 1.92 TB + 2 x 15.3 TB (with optional mid -tray and rear LFF drive cage, plus 2 SFF SSD rear)
Hot Plug SFF SATA SSD	230.4 TB	24+6 x 7.68 TB (with optional 2SFF drive cage)
Hot Plug SFF NVMe PCIe SSD	368.64TB NVMe	24 x 15.36TB NVMe

Standard Features

Notes:

- 2x m.2 drives are supported on the system board.
 - UFF drives are also supported.
-

Graphics

Integrated Video Standard

- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory

HPE iLO 5 on system management memory

- 32 MB Flash
 - 4 Gbit DDR 3 with ECC protection
-

Power Supply

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

Notes: Available in 94% efficiency.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

Notes:

- Available in 94% and 96% efficiency.
- Also available in -48VDC and 227VAC/380VDC power inputs.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

Notes:

- Available in 94% efficiency.
- 240v power input only.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the **ProLiant Power Cables** web page.

To review the power requirements for your selected system, please use the **HPE Power Advisor Tool**.

For information on power specifications and technical content visit **HPE Server power supplies**.

Interfaces

Standard Features

Serial	Optional, rear
Display Port	1 (SFF 1 front, optional via Universal Media Bay, 882097-B21), 8 LFF chassis standard
FlexibleLOM Network Ports	4 x 1 Gb ports shipping standard (if equipped), with optional FlexibleLOM or stand up card Notes: 4 x 1 Gb ports are not equipped on new boards for 7xx2 series processors
HPE iLO Remote Management Network Port	1 Gb Dedicated
Front iLO Service Port	1 standard (Not available on 12 LFF chassis or when SID is ordered, note iLO dongle required, 880123-B21)
Micro SD Slot	1 Micro SD Notes: The Micro SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.
USB 3.0	Up to 5 total: 1 front, 2 rear, 2 internal (secure), 2 optional USB 2.0 front via Universal Media Bay, or standard on 8LFF chassis
SID (Systems Insight Display)	Optional Notes: Not shipping as standard. Available as a CTO option or as a field upgrade (882099-B21).

Operating Systems and Virtualization Software Support for ProLiant Servers

AMD® EPYC® 7xx2 Series Processor Family

- [Windows Server 2016 \(Most Recent Version\)](#)
- [Windows Server 2019 \(Most Recent Version\)](#)
- [VMware ESXi 6.5 U3](#)
- [VMware ESXi 6.7 U3](#)
- [Red Hat Enterprise Linux \(RHEL\) 7.6](#)
- [SUSE Linux Enterprise Server \(SLES\) 12 SP4](#)
- [SUSE Linux Enterprise Server \(SLES\) 15 SP1](#)
- [Citrix XenServer](#)

Notes: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<https://www.hpe.com/us/en/servers/server-operating-systems.html>

Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 3.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- VGA/Display Port

Notes: [This support is on the optional Universal Media Bay.](#)

- USB 3.0 Compliant (internal)

Standard Features

- USB 2.0 Compliant (external ports via SUV)

Notes: This support is on the optional Universal Media Bay.

- Energy Star
- SMBIOS 3.1
- UEFI 2.6
- Redfish API
- IPMI 2.0
- Secure Digital 2.0
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- Active Directory v1.0
- European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:
<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

- ASHRAE A3/A4

Notes: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

- UEFI (Unified Extensible Firmware Interface Forum)

Notes: UEFI is the default for the DL385 Gen10. Legacy mode can be selected in the field or as a CTO option (758959-B22).

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

Notes: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack

HPE Server UEFI/Legacy ROM

- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization

Standard Features

UEFI Boot Mode only:

- TPM 2.0 Support
- NVMe Boot Support
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

Notes:

- For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.
 - UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.
-

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Learn more at <http://www.hpe.com/servers/uefi>.

Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at

<http://www.hpe.com/info/restfulapi>.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at

<http://www.hpe.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

Smart Update

Standard Features

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <https://buy.hpe.com/b2c/us/en/enterprise-software/infrastructure-management-software/system-server-management-software/hpe-system-server-software-management-software/smart-update-manager-%28sum%29/p/5182020>.

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit:

<http://www.hpe.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at

<http://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at

<http://www.hpe.com/info/oneview>.

HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation (iLO 5 certification in progress)
- Common Criteria certification (iLO 5 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- Tamper-free updates - components digitally signed and verified
- Secure Recovery - recover critical firmware to known good state on detection of compromised firmware

Standard Features

- Ability to rollback firmware
 - Secure erase of NAND/User data
 - TPM (Trusted Platform Module) 1.2 option
 - TPM (Trusted Platform Module) 2.0 option
 - Bezel Locking Kit option
 - Chassis Intrusion detection option
-

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE iLO Advanced Premium Security Edition

HPE iLO Advanced Premium Security Edition for iLO 5 includes iLO Advanced License plus high-end security modes, unique security capabilities, like Automatic FW recovery; Runtime FW verification, and Secure erase. Learn more about HPE iLO Advanced Premium Security Edition at: <http://www.hpe.com/servers/ilopremium>.

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

Accelerator and GPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

Optional Features

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we have created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

Service and Support

HPE Pointnext - Service and Support

Get the most from your HPE Products. Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services**, focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are-the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get Faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Recommended Services

HPE Pointnext Tech Care

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimagined from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15 minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00108652enw>

HPE Datacenter Care

HPE Datacenter Care helps customers address the pressing needs of IT today and smoothly transform to a more agile cloud-like IT operations model. We help run and monitor your IT by offloading the day to day routine tasks, helping customers be more predictive and proactive, and saving time with one place to call with for all of their IT.

Partner with an assigned account team backed by local and global experts, access HPE enhanced call experience with priority access, use specialized support for complex, technologies, choose hardware and software support for your devices, implement proactive monitoring to stay ahead of issues, and access HPE IT best practices and IP. HPE Datacenter Care advantage options are available to add to your agreement to give you specialized expertise for performance, security, back up analysis, and much more. Datacenter Care is available as both tailored statement of work and as a packaged service for 3, 4, and 5 year terms.

Service and Support

<https://www.hpe.com/us/en/services/datacenter-hybrid-services.html>

Other related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=5981-9356enw>

HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

DC for Hyperscale

Datacenter Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

Service and Support

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

Notes: *HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

Notes: HPE ProLiant DL385 Gen10 Plus Server is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Packard Enterprise due to malfunction.

Pre-configured Models

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

	Entry Model	Entry Model	Performance Model	Solution Model
SKU Number	P16690-B21 P16690-291	P16692-B21 P16692-291	P16694-B21 P16694-291	P16693-B21 P16693-291
Model Name	HPE ProLiant DL385 Gen10 7262 3.2GHz 8-core 1P 16GB-R 12LFF 800W RPS Server	HPE ProLiant DL385 Gen10 7262 3.2GHz 8-core 1P 16GB-R 8SFF 800W RPS Server	HPE ProLiant DL385 Gen10 7302 3.0GHz 16-core 1P 16GB-R 8SFF 800W RPS Server	HPE ProLiant DL385 Gen10 7452 2.2GHz 32-core 1P 16GB-R 24SFF 800W RPS Server
Processor	7262 (8-Core, 3.2 GHz, 155W)	7262 (8-Core, 3.2 GHz, 155W)	7302 (16-Core, 3.0 GHz, 155W)	7452 (32-Core, 2.2GHz, 155W)
Number of Processors	One processor	One processor	One processor	One processor
Memory	16 GB RDIMM DR 2933 MT/s (1x 16 GB)	16 GB RDIMM DR 2933 MT/s (1x 16 GB)	16 GB RDIMM DR 2933 MT/s (1x 16 GB)	16 GB RDIMM DR 2933 MT/s (1x 16 GB)
Network Controller	HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card	HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card	HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card	HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card
Storage Controller	P816i-a Notes: – 16-Port modular Smart Array. – Smart Storage battery included.	P408i-a Notes: – 8-Port modular Smart Array. – Smart Storage battery included.	P408i-a Notes: – 8-Port modular Smart Array. – Smart Storage battery included.	P408i-a Notes: – 8-Port modular Smart Array. – Smart Storage battery included.
Hard Drive	None ship as standard	None ship as standard	None ship as standard	None ship as standard
Internal Storage	12 LFF chassis	8 SFF Chassis	8 SFF Chassis	24 SFF Chassis
Optical Drive Bay	Optional via Universal Media Bay (included)	Optional Universal Media Bay (included)	Optional Universal Media Bay (included)	Optional Universal Media Bay (included)
Optical Drive	None ship as standard	None ship as standard	None ship as standard	None ship as standard
PCI-Express Slots	3-slots (x8, x16, x8) as standard	3-slots (x8, x16, x8) as standard	3-slots (x8, x16, x8) as standard	3-slots (x8, x16, x8) as standard
Power Supply	1x 800W HPE FlexSlot Power Supply	1x 800W HPE FlexSlot Power Supply	1x 800W HPE FlexSlot Power Supply	1x 800W HPE FlexSlot Power Supply
Fans	6-High Performance fans	4-standard fans	4-standard fans	6-High Performance fans

Pre-configured Models

Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced
Energy Star	2.1 certified
Form Factor	2U Rack, Easy Install rails without CMA
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.

Entry Model	
SKU Number	P26897-B21 P26897-291
Model Name	HPE ProLiant DL385 Gen10 7252 3.1GHz 8-core 1P 16GB-R 8SFF 500W PS Server
Processor	7252 (8-Core, 3.1 GHz, 500W)
Number of Processors	One processor
Memory	16 GB RDIMM DR 2933 MT/s (1x 16 GB)
Network Controller	HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card
Storage Controller	P408i-a Notes: –8-Port modular Smart Array. –Smart Storage battery included.
Hard Drive	None ship as standard
Internal Storage	8 SFF Chassis
Optical Drive Bay	Optional Universal Media Bay (882097-B21)
Optical Drive	None ship as standard
PCI-Express Slots	3-slots (x8, x16, x8) as standard
Power Supply	1x 500W HPE FlexSlot Power Supply
Fans	4-standard fans
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced
Energy Star	2.1 certified
Form Factor	2U Rack, Easy Install rails without CMA
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.

Pre-configured Models

Performance Model	
SKU Number	P26898-B21 P26898-291
Model Name	HPE ProLiant DL385 Gen10 7282 2.8GHz 16-core 1P 32GB-R 8SFF 800W PS Server
Processor	7282 (16-Core, 2.8GHz, 800W)
Number of Processors	One processor
Memory	32 GB RDIMM DR 2933 MT/s (1x 32 GB)
Network Controller	HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card
Storage Controller	P408i-a Notes: –8-Port modular Smart Array. –Smart Storage battery included.
Hard Drive	None ship as standard
Internal Storage	8 SFF Chassis (upgradeable to 24 SFF front + 6SFF rear)
Optical Drive Bay	Optional Universal Media Bay (882097-B21)
Optical Drive	None ship as standard
PCI-Express Slots	3-slots (x8, x16, x8) as standard
Power Supply	1x 800W HPE FlexSlot Power Supply
Fans	4-standard fans
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced
Energy Star	2.1 certified
Form Factor	2U Rack, Easy Install rails without CMA
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.

Country Code Key

xx1 = B21 Worldwide

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan.

xx1 = 291 Japan

Configuration Information

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

CTO Server	HPE ProLiant DL385 Gen10 8 LFF CTO Server	HPE ProLiant DL385 Gen10 12 LFF CTO Server	HPE ProLiant DL385 Gen10 8 SFF CTO Server	HPE ProLiant DL385 Gen10 24 SFF CTO Server
SKU Number	878615-B21	878614-B21	878612-B21	878613-B21
TAA SKU	878619-B21	878618-B21	878616-B21	878617-B21
Processor	Not included as standard	Not included as standard	Not included as standard	Not included as standard
DIMM Slots	32-DIMM slots	32-DIMM slots	32-DIMM slots	32-DIMM slots
Storage Controller	Embedded s100i SW RAID for 2 x M.2 SATA support, choice of HPE modular Smart Array and PCIe plug-in controller			
PCIe	Three standard in primary riser			
Drive Cage - included	8 LFF	12 LFF	8 SFF	24 SFF
Network Controller	HPE 1Gb Ethernet 4-Port 331i Adapter (if equipped) plus optional HPE FlexibleLOM or stand up card			
Fans	6-Standard	6-High Performance	4-Standard	6-Performance
Management	HPE iLO with Intelligent Provisioning (standard), iLO Advances and OneView (optional)			
USB	1x 3.0 standard plus iLo front service port	None as standard	1x 3.0 standard plus iLo front service port	1x 3.0 standard plus iLo front service port

Notes:

- HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO).
- TAA chassis are only orderable in North America and Canada.
- The HPE ProLiant DL385 Gen10 12 LFF CTO Server ships with the cable required for the P816i-a installation.
- The cables that come standard with the 8SFF chassis for BOX3 work for the first 8 drives, and are connected to the E208

Configuration Information

- or the P408. When the 8SFF drive cage for BOX2 or BOX1 is ordered, the cables come with the drive cage kits.
- All CTO servers are Energy Star 2.1 compliant.
- 4x 1 embedded LOM is not equipped on new boards for 7xx2 series processor

CTO Server	8 SFF CTO Chassis	24 SFF CTO Chassis	8 LFF CTO Chassis	12 LFF CTO Chassis
Included Drive Cage	8 SFF SAS/SATA	3x 8 SFF SAS/SATA	8 LFF + UMB	12 LFF Chassis
Additional drive cages	-	-	-	-
Universal Media Bay	1 Optional	Not available	1 Included	Not available
ODD	1 Optional with UMB	Not available	1 Optional	Not available
8 SFF Drive Cage	Up to 2 Optional	Not available	Not available	Not available
8 NVME/SAS Bay	Up to 3 Optional	Not available	Not available	Not available
8 NVME Cage	Up to 3 Optional	Not available	Not available	Not available
2 SFF SAS/SATA (Front)	1 Optional with UMB	Not available	1 Optional	Not available
2 SFF SAS/SATA (Rear)	1 Optional	1 Optional	1 Optional	1 Optional
2 NVMe (Front)	1 Optional with UMB	Not available	1 Optional	Not available
4 LFF Mid-plane	Not available	Not available	1 Optional	1 Optional
3 LFF Rear	Not available	Not available	1 Optional	1 Optional

Notes:

- This applies to CTO configurations, field upgrades may differ depending field configuration.
- 3x 8 NVMe option on SFF requires the second processor be installed and I/O cards are limited to ALOM options.

Step 2: Choose Required Options

Please select one -L21 processor required below.

For second processor, please select the same processor model with -B21 from Core Options - HPE Processors section.

For example: first processor, select 874752-L21 then for second processor, select 874752-B21.

Notes:

- 8SFF CTO 1P models ship with 4 standard fans. The second processor option kit contains 2 additional fans. 12 LFF and 24 SFF CTO Servers ship with 6 High performance fans included; 8LFF CTO Servers ship with 6 Standard fans included. High performance fan kit is available to meet ambient temperature environments are required for rear drives or NVMe configurations. NVMe is limited to front install only.
- Mixing of 2 different processor models are NOT allowed.
- DDR4 memory speed will depend on the quantity and type of DIMMs installed.
- Processors with greater than 180W will ship with the High Performance heatsink.
- Processors with greater than 180W will require the High Performance fan kit.

Step 2a: Choose Processors (only one of the following unless otherwise noted)

Processor Option Kits

SKU

AMD® EPYC® 7xx2 Generation Processor Family

AMD EPYC 7702 (2.0GHz/64-core/200W) FIO Processor Kit for HPE ProLiant DL385 Gen10

P16636-L21

Notes: Ships with High Performance Heatsink.

Configuration Information

AMD EPYC 7552 (2.2GHz/48-core/165-200W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P21862-L21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7502 (2.5GHz/32-core/180-200W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P16638-L21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7402 (2.8GHz/24-core/180-200W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P16640-L21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7352 (2.3GHz/24-core/155W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P21422-L21
Notes: Ships with Standard Heatsink	
AMD EPYC 7452 (2.35GHz/32-core/155W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P16642-L21
Notes: Ships with Standard Heatsink.	
AMD EPYC 7302 (3.0GHz/16-core/155W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P16643-L21
Notes: Ships with Standard Heatsink.	
AMD EPYC 7262 (3.2GHz/8-core/155-180W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P16645-L21
Notes: Ships with Standard Heatsink.	
AMD EPYC 7702 (2.0GHz/64-core/200W) Processor Kit for HPE ProLiant DL385 Gen10	P16636-B21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7552 (2.2GHz/48-core/165-200W) Processor Kit for HPE ProLiant DL385 Gen10	P21862-B21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7532 (2.4GHz/32-core/200W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P25769-L21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7502 (2.5GHz/32-core/180-200W) Processor Kit for HPE ProLiant DL385 Gen10	P16638-B21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7402 (2.8GHz/24-core/180-200W) Processor Kit for HPE ProLiant DL385 Gen10	P16640-B21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7352 (2.3GHz/24-core/155W) Processor Kit for HPE ProLiant DL385 Gen10	P21422-B21
Notes: Ships with Standard Heatsink	
AMD EPYC 7452 (2.35GHz/32-core/155W) Processor Kit for HPE ProLiant DL385 Gen10	P16642-B21
Notes: Ships with Standard Heatsink.	
AMD EPYC 7302 (3.0GHz/16-core/155W) Processor Kit for HPE ProLiant DL385 Gen10	P16643-B21
Notes: Ships with Standard Heatsink.	
AMD EPYC 7282 (2.8GHz/16-core/120W) FIO Processor Kit for HPE ProLiant DL325 Gen10 Plus	P19631-L21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7272 (2.9GHz/12-core/120W) FIO Processor Kit for HPE ProLiant DL325 Gen10	P25852-L21
Notes: Ships with High Performance Heatsink.	
AMD EPYC 7252 (3.1GHz/8-core/120W) FIO Processor Kit for HPE ProLiant DL385 Gen10	P25772-L21

Configuration Information

Notes: Ships with High Performance Heatsink.

AMD EPYC 7262 (3.2GHz/8-core/155-180W) Processor Kit for HPE ProLiant DL385 Gen10 P16645-B21

Notes: Ships with Standard Heatsink

Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to: <http://www.hpe.com/docs/amd-population-rules>

For Gen10 memory speed table, please go to: <http://www.hpe.com/docs/amd-speed-tables>

Notes:

- Memory DIMM availability with a server platform is dependent upon completion of certification testing.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.

Registered DIMMs (RDIMMs)

HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P19040-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P19042-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart	P19041-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart	P19043-B21
HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P19045-B21

Load Reduced DIMMs (LRDIMMs)

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit	P19044-B21
HPE 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit	P19047-B21

Notes:

- Mixing of x4 & x8 memory is not allowed
- 2933 MT/s DIMMs are only supported with AMD® EPYC® 7xx2 Series Processor Family
- 2933 MT/s memory SKUs offer a transfer rate of 2933 MT/s at 1 DIMM per channel and 2666 MT/s at 2 DIMMs per channel

Memory Blank Kit

HPE DDR4 DIMM Blank Kit	P07818-B21
-------------------------	------------

Notes: This kit is required for processors above 126W and when 4LFF MID-Plane Carrier kit (882096-B21) is selected

Step 2c: Choose Power Supplies

Select one or two power supplies from below.

Notes: Mixing of 2 different power supplies is NOT allowed.

HPE Flex Slot Power Supplies

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865408-B21
HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21

Notes:

- Select one or more power supplies.
- 1600W Power supplies only support high line voltage (200VAC to 240VAC).

Configuration Information

- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/hppoweradvisor>.
- All power supplies in a server should match. Mixing Power Supplies is not supported.
- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.

Step 3: Choose Additional Factory Integratable Options

One of the following from each list may be selected if desired at time of factory integration

HPE Unique Options

Notes: DL385 has support for 4x NVMe drives when the second CPU is selected. NVMe cable 871827-B21 is required and supports 2 drives each.

Description	SKU
HPE DL38X Gen10 Slot 1/2 x16/x16 FIO Riser Kit	871674-B21
Notes:	
– Slot 1 or 2 in Primary location.	
– Supports Full Height and Full length cards.	
– Bus width x16, x16, Connector Width x16, x16.	
HPE DL38X Gen10 x16/x16 GPU Slot2/3 FIO Riser Kit	871676-B21
Notes:	
– Primary Riser, Connector in slot 2 & 3 for GPU support.	
– Supports Full Height and Full length cards.	
– Bus width x16, x16, Connector Width x16, x16.	
HPE DL38X Gen10 4 NVMe Box 1 FIO Option	878186-B21
HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe Slim SAS FIO Riser Kit	871673-B21
Notes:	
– Supports 3x 8 and 1-port for NVMe.	
– Supports Full Height and half-length cards.	
– Bus width x8, x8, x8 Connector Width x8, x8, x8.	
HPE DL38X Gen10 2 NVMe FIO Option	878189-B21
Notes:	
– This is a factory integrated only option.	
– This will connect 2 SFF cage installed in the front of the chassis to NVMe.	
– This supports NVMe only, if desired, to maintain SATA drive compatibility the 3 POS cable kit must also be selected (882100-B21).	
HPE DL380X/Apollo 6500 Gen10 6+2 NVMe FIO Option	878192-B21
Notes:	
– This is a factory integrated only option.	
– Indicates the cage will also have an NVMe connection.	
– When NVMe is selected, the SAS/SATA will no longer function unless the controller selection supports it, or the 3POS cable is selected for S100i connection.	
HPE DL38X Gen10 8 SFF Front Cage Removal FIO Option	873763-B21
Notes:	
– This is a factory integrated only option.	
– Will remove the Primary 8SFF cage in Box 3 of the 8SFF and replace with a Box blank.	
HPE DL38X Gen10 Primary Riser Removal FIO Option	873766-B21
Notes:	
– This is a factory integrated only option.	
– Will remove the Primary shipping PCIe riser.	
HPE Legacy FIO Mode Setting	758959-B22

Configuration Information

Notes: UEFI is the default, this FIO part can be used for CTO to enable Legacy mode.

HPE Smart Memory Fast Fault Tolerance FIO Setting 875293-B21

Notes: Fast Fault Tolerance is a new feature in Gen10 server memory that enables the system to boot with full memory performance while monitoring for DRAM device failures.

HPE DL38X Gen10 x16/x16/x16 Secondary GPU FIO Riser Kit P14373-B21

HPE DL38X Gen10 x16/x16/x16 Primary GPU FIO Riser Kit P14374-B21

Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below

Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

HPE DL38X NVMe 8 Solid State Drive Express Bay Enablement Kit 826689-B21

Notes:

- This option provides support for up to 8 NVMe drives, and can only be populated in Box 1, Box 2 and Box 3 of the SFF chassis.
- The HPE DL385 Gen10 High Performance fan kit is required for NVMe support (867810-B21).
- The HPE DL38X Gen10 4-port 8 NVMe SlimSAS Riser (867807-B21) is required to support this.
- If BOX 1, 2 and 3 are populated for full 24 drive NVMe support this requires 3 risers (1st 867807-B21, 2nd 873732-B21, & 3rd 867808-B21) and the on board NVMe connections with 2x NVMe cable (871827-B21).
- There are limitations on GPU support with the NVMe bay installed.

HPE DL385 Gen10 Universal Media Bay 882097-B21

Notes:

- The HPE DL385 Gen10 Universal Media bay provides front Display Port and 2xUSB 2.0; plus support for 2x SFF front drives or 2 NVMe front drives (826687-B21 and NVMe riser required see note below) and ODD support (Not included); and can only be located in Box1 in either an 8 SFF or 8+8 SFF model.
- This is a SFF model option only.
- For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations.
- For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) is needed or the NVMe cable (871827-B21) with the on board NVMe connections may be used.

HPE DL38X Gen10 Premium 6 SFF SAS/SATA + 2 NVMe or 8 SFF SAS/SATA Bay Kit 826690-B21

Notes:

- This kit can be supported in Box 1, 2 or 3 and provides support for up to 8 SFF SAS/SATA or 6 SAS/SATA + 2 NVMe drives per Box.
- With NVMe drives a specific riser is required for 1P. 2P enables the on board NVMe connection with the NVMe cable 871827-B21 or this can be enabled with NVMe risers.
- When adding to Box 1 the addition of the High Performance Fan kit (867810-B21) is required

HPE DL385 Gen10 High Performance Heatsink Kit 882098-B21

Notes:

- Required for GPU installations.
- Processor kits above 180W include a High Performance Heatsink.

HPE DL385 Gen10 1U High Performance Heat Sink Kit P19368-B21

Notes: This kit is required for processors above 126W and when 4LFF mid-plane carrier kit (882096-B21) is selected

Notes: Both Heatsink kits - 882098-B21 & P19368-B21 cannot be selected together

HPE DL38X Gen10 High Performance Temperature Fan Kit 867810-B21

Notes:

- This kit is also required to support GPUs configurations.
- This is required for NVMe configurations.
- This kit provides maximum cooling for your Server.
- This kit is required when Box 1, 2 and 3 are populated.

HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit 826688-B21

Notes:

- 2 SFF in the rear is only supported with a 24 SFF model or 12 LFF model.
- In the rear this leaves 1x16 slot accessible.
- Rear drives require the addition of the High Performance Fan kit (867810-B21) .

HPE DL38X Gen10 2SFF Premium HDD Front NVMe or Front/Rear SAS/SATA Kit 826687-B21

Core Options

Notes:

- HPE DL38X Gen10 High Performance Temperature Fan Kit (867810-B21)
- NVMe drives require the addition of an NVMe capable riser or a 2P configuration and the NVMe cable 871827-B21 for the on board NVMe connections.
- To maintain SATA compatibility with NVMe connections, the 3 POS cable (882100-B21) must also be used.
- Drive cage can be used in the rear of the chassis, but will not support NVMe drives rear.
- Supports uFF drives.

HPE DL38X Gen10 8LFF Front 2NVMe HDD Bay Kit 873781-B21

Notes:

- Supports 2 NVMe in the Universal Media bay (included) on the 8 LFF model.
- For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations.
- For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) is needed or the NVMe cable 871827-B21 with the on board NVMe connections may be used.
- NVMe drives require the addition of the High Performance Fan kit (867810-B21).

HPE DL38X Gen10 12Gb SAS Expander Card Kit with Cables 870549-B21

Notes:

- SAS expander to enable 24 SFF field upgrade.
- Primary population in slot 3 of the primary riser.

HPE DL3XX Gen10 Rear Serial Cable and Enablement Kit 873770-B21

HPE DL38X Gen10 8LFF Front 2SFF SAS/SATA HDD Kit 867805-B21

HPE DL385 Gen10 System Insight Display Kit 882099-B21

Notes: Systems Insight Display no longer ships as standard but is available as a Factory Integrated or field upgrade option.

HPE Processors

SKU

Processor Option Kits

AMD® EPYC® 7xx2 Generation Processor Family

AMD EPYC 7702 (2.0GHz/64-core/200W) Processor Kit for HPE ProLiant DL385 Gen10 P16636-B21

Notes: Ships with High Performance Heatsink.

AMD EPYC 7552 (2.2GHz/48-core/165-200W) FIO Processor Kit for HPE ProLiant DL385 Gen10 P21862-L21

Notes: Ships with High Performance Heatsink.

AMD EPYC 7502 (2.5GHz/32-core/180-200W) Processor Kit for HPE ProLiant DL385 Gen10 P16638-B21

Notes: Ships with High Performance Heatsink.

AMD EPYC 7402 (2.8GHz/24-core/180-200W) Processor Kit for HPE ProLiant DL385 Gen10 P16640-B21

Notes: Ships with High Performance Heatsink.

AMD EPYC 7352 (2.3GHz/24-core/155W) Processor Kit for HPE ProLiant DL385 Gen10 P21422-B21

Notes: Ships with Standard Heatsink

AMD EPYC 7452 (2.35GHz/32-core/155W) Processor Kit for HPE ProLiant DL385 Gen10 P16642-B21

Notes: Ships with Standard Heatsink.

AMD EPYC 7302 (3.0GHz/16-core/155W) Processor Kit for HPE ProLiant DL385 Gen10 P16643-B21

Notes: Ships with Standard Heatsink.

AMD EPYC 7262 (3.2GHz/8-core/155-180W) Processor Kit for HPE ProLiant DL385 Gen10 P16645-B21

Notes: Ships with Standard Heatsink

Notes:

- Ships with Standard Heatsink.
- DDR4 memory speed will depend on the quantity and type of DIMMs installed.
- The xxxxxx-L21 is the first processor shipped, the xxxxxx-B21 is the 2nd processor and ships with 2 additional fans for

Core Options

factory or field installation.

- Processors above 180W use a High Performance Heatsink and the high performance fan kit (867810-B21).
- Processors with greater than 180W do not include the fans as the selection of processors above 180W requires the High Performance fan kit that comes with 6 fans.

Memory Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, Hewlett Packard Enterprise recommends memory from the list located here:

<http://hpe.com/products/recommend>.

Best product availability is limited to US, Canada, and Latin America at this time.

HPE Optical Drives

HPE 9.5mm SATA DVD-ROM Optical Drive 726536-B21

Notes:

- HPE DL385 Gen10 Universal Media Bay Kit (882097-B21) is required for this option on a SFF model. No support in 12 LFF or 24 SFF models.
- Not supported anytime the 3 POS cable (882100-B21) is selected.

HPE 9.5mm SATA DVD-RW Optical Drive 726537-B21

Notes:

- HPE DL385 Gen10 Universal Media Bay Kit (882097-B21) is required for this option on a SFF model. No support in 12 LFF or 24 SFF models.
- Not supported anytime the 3 POS cable (882100-B21) is selected.

HPE Mobile USB DVD-RW Optical Drive 701498-B21

Notes: This is only supported on USB 3.0 ports.

HPE Drives

Enterprise - 12G SAS - SFF Drives

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 870753-B21

HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 872475-B21

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 870757-B21

HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 872477-B21

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 870759-B21

HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 872479-B21

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD 872481-B21

HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD 881457-B21

Enterprise - 12G SAS - LFF Drives

HPE 300GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware HDD P04693-B21

HPE 600GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware HDD P04695-B21

Midline - 12G SAS - SFF Drives

Core Options

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	832514-B21
HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21
Midline - 12G SAS - LFF Drives	
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872485-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872487-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861754-B21
HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	819201-B21
HPE 10TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	857644-B21
HPE 12TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	881779-B21
HPE 14TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	P09153-B21
HPE 16TB SAS 12G Business Critical 7.2K LFF (3.5in) SC 1yr Wty 512e ISE HDD	P23863-B21
HPE 18TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty 512e ISE HDD	P37664-B21
Midline - 6G SATA - SFF Drives	
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	655710-B21
HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765455-B21
Midline - 6G SATA - LFF Drives	
HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861691-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872489-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872491-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861750-B21
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	819203-B21
HPE 10TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	857648-B21
HPE 12TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	881785-B21
HPE 14TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	P09163-B21
HPE 16TB SATA 6G Business Critical 7.2K LFF (3.5in) SC 1yr Wty 512e ISE HDD	P23857-B21
HPE 18TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty 512e ISE HDD	P37673-B21

SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends SSDs from the list located here:

<http://www.hpe.com/products/recommend>.

Read Intensive - 12G SAS - SFF - Solid State Drives

HPE 960GB SAS 12G Read Intensive SFF SC PM5 SSD	P04517-B21
HPE 960GB SAS 24G Read Intensive SFF SC PM6 SSD	P26285-B21
HPE 960GB SAS 12G Read Intensive SFF SC PM1643a SSD	P19903-B21
HPE 1.92TB SAS 24G Read Intensive SFF SC PM6 SSD	P26302-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19905-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19907-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC PM5 SSD	P04521-B21

Core Options

HPE 3.84TB SAS 24G Read Intensive SFF SC PM6 SSD	P26306-B21
HPE 7.68TB SAS 12G Read Intensive SFF SC PM5 SSD	P04523-B21
HPE 7.68TB SAS 24G Read Intensive SFF SC PM6 SSD	P26310-B21
HPE 7.68TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19909-B21
HPE 15.3TB SAS 24G Read Intensive SFF SC PM6 SSD	P26314-B21
HPE 15.36TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19911-B21

Mixed Use - 12G SAS - SFF - Solid State Drives

HPE 800GB SAS 24G Mixed Use SFF SC PM6 SSD	P26290-B21
HPE 800GB SAS 12G Mixed Use SFF SC PM1645a SSD	P19913-B21
HPE 1.6TB SAS 24G Mixed Use SFF SC PM6 SSD	P26354-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P09092-B21
HPE 1.6TB SAS 12G Mixed Use SFF SC PM1645a SSD	P19915-B21
HPE 3.2TB SAS 24G Mixed Use SFF SC PM6 SSD	P26358-B21
HPE 3.2TB SAS 12G Mixed Use SFF SC PM1645a SSD	P19917-B21
HPE 6.4TB SAS 24G Mixed Use SFF SC PM6 SSD	P26362-B21
HPE 6.4TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P09096-B21
HPE 6.4TB SAS 12G Mixed Use SFF SC PM1645a SSD	P19919-B21

Write Intensive - 12G SAS - SFF - Solid State Drives

HPE 400GB SAS 12G Write Intensive SFF SC PM5 SSD	P04541-B21
HPE 400GB SAS 24G Write Intensive SFF SC PM6 SSD	P26295-B21
HPE 400GB SAS 12G Write Intensive SFF SC SS540 SSD	P21125-B21
HPE 800GB SAS 12G Write Intensive SFF SC PM5 SSD	P04543-B21
HPE 800GB SAS 24G Write Intensive SFF SC PM6 SSD	P26372-B21
HPE 800GB SAS 12G Write Intensive SFF SC SS540 SSD	P21127-B21
HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P09102-B21
HPE 1.6TB SAS 12G Write Intensive SFF SC PM5 SSD	P04545-B21
HPE 1.6TB SAS 24G Write Intensive SFF SC PM6 SSD	P26376-B21
HPE 1.6TB SAS 12G Write Intensive SFF SC SS540 SSD	P21129-B21

Mixed Use - 12G Value SAS - SFF - Solid State Drives

HPE 800GB SAS 12G Mixed Use SFF SC SS540 SSD	P21131-B21
HPE 1.6TB SAS 12G Mixed Use SFF SC SS540 SSD	P21133-B21
HPE 3.2TB SAS 12G Mixed Use SFF SC SS540 SSD	P21135-B21
HPE 6.4TB SAS 12G Mixed Use SFF SC SS540 SSD	P21137-B21

Read Intensive - 12G Value SAS - SFF - Solid State Drives

HPE 960GB SAS 12G Read Intensive SFF SC SS540 SSD	P21139-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC SS540 SSD	P21141-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC SS540 SSD	P21143-B21
HPE 7.68TB SAS 12G Read Intensive SFF SC SS540 SSD	P21145-B21
HPE 15.3TB SAS 12G Read Intensive SFF SC SS540 SSD	P21147-B21

Mixed Use - 6G SATA - SFF - Solid State Drives

HPE 480GB SATA 6G Mixed Use SFF SC S4610 SSD	P05976-B21
HPE 480GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	P18432-B21
HPE 960GB SATA 6G Mixed Use SFF SC S4610 SSD	P05980-B21
HPE 960GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	P18434-B21

Mixed Use - 6G SATA - SFF - Solid State Drives

Core Options

HPE 1.92TB SATA 6G Mixed Use SFF SC S4610 SSD	P05986-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	P18436-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC S4610 SSD	P05994-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	P18438-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC SM883 SSD	P21517-B21
HPE 480GB SATA 6G Mixed Use SFF SC 5300M SSD	P19947-B21
HPE 960GB SATA 6G Mixed Use SFF SC 5300M SSD	P19949-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC 5300M SSD	P19951-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC 5300M SSD	P19953-B21
Mixed Use - 6G SATA - LFF - Solid State Drives	
HPE 480GB SATA 6G Mixed Use LFF SCC 5300M SSD	P19978-B21
Read Intensive - 6G SATA - SFF - Solid State Drives	
HPE 240GB SATA 6G Read Intensive SFF SC PM883 SSD	P04556-B21
HPE 240GB SATA 6G Read Intensive SFF SC S4510 SSD	P05924-B21
HPE 240GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18420-B21
HPE 480GB SATA 6G Read Intensive SFF SC SE4011 SSD	P06194-B21
HPE 480GB SATA 6G Read Intensive SFF SC S4510 SSD	P05928-B21
HPE 480GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18422-B21
HPE 480GB SATA 6G Read Intensive SFF SC PM883 SSD	P04560-B21
HPE 960GB SATA 6G Read Intensive SFF SC PM883 SSD	P04564-B21
HPE 960GB SATA 6G Read Intensive SFF SC SE4011 SSD	P06196-B21
HPE 240GB SATA 6G Read Intensive SFF SC 5300P SSD	P19935-B21
HPE 480GB SATA 6G Read Intensive SFF SC 5300P SSD	P19937-B21
HPE 960GB SATA 6G Read Intensive SFF SC 5300P SSD	P19939-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC 5300P SSD	P19941-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC 5300P SSD	P19943-B21
HPE 7.68TB SATA 6G Read Intensive SFF SC 5300P SSD	P19945-B21
Read Intensive - 6G SATA - SFF - Solid State Drives	
HPE 960GB SATA 6G Read Intensive SFF SC S4510 SSD	P05932-B21
HPE 960GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18424-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC PM883 SSD	P04566-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC SE4011 SSD	P06198-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC S4510 SSD	P05938-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18426-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC PM883 SSD	P04570-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC SE4011 SSD	P06200-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC S4510 SSD	P05946-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18428-B21
HPE 7.68TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18430-B21
Read Intensive - 6G SATA - SFF - Solid State Drives	
HPE 480GB SATA 6G Read Intensive LFF SCC PM883 SSD	P09687-B21
Mixed Use - 6G SATA - SFF - Solid State Drives	
HPE 480GB SATA 6G Mixed Use SFF SC SM883 SSD	P09712-B21
HPE 480GB SATA 6G Mixed Use SFF SC SE5031 SSD	P13658-B21
HPE 960GB SATA 6G Mixed Use SFF SC SM883 SSD	P09716-B21
HPE 960GB SATA 6G Mixed Use SFF SC SE5031 SSD	P13660-B21

Core Options

HPE 1.92TB SATA 6G Mixed Use SFF SC SM883 SSD	P09722-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC SE5031 SSD	P13662-B21
HPE 3.84TB SATA 6G Mixed Use SFF RW SE5031 SSD	P13664-B21
Mixed Use - 6G SATA - LFF - Solid State Drives	
HPE 960GB SATA 6G Mixed Use LFF SCC SM883 SSD	P09718-B21
HPE 1.92TB SATA 6G Mixed Use LFF SCC SM883 SSD	P09724-B21
VRO - 6G SATA - SFF - Solid State Drives	
HPE 1.92TB SATA 6G Very Read Optimized SFF SC 5210 SSD	P23487-B21
HPE 3.84TB SATA 6G Very Read Optimized SFF SC 5210 SSD	P23489-B21
HPE 7.68TB SATA 6G Very Read Optimized SFF SC 5210 SSD	P23493-B21
Read Intensive - NVMe - SFF - Solid State Drives	
HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD	P13676-B21
HPE 960GB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 CM6 SSD	P20015-B21
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 CD6 SSD	P25944-B21
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 PE8010 SSD	P19807-B21
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 PE8010 SSD	P19809-B21
HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10214-B21
HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10210-B21
HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07192-B21
HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD	P13678-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 CM6 SSD	P20017-B21
HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 CD6 SSD	P20139-B21
HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 PE8010 SSD	P19811-B21
HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 PE8010 SSD	P19813-B21
HPE 2TB NVMe Gen3 High Performance Read Intensive SFF SCN U.2 P4510 SSD	P13695-B21
HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10212-B21
HPE 3.84TB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD	P13680-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 CM6 SSD	P20019-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 CD6 SSD	P20141-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 PE8010 SSD	P19815-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 PE8010 SSD	P19817-B21
HPE 4TB NVMe Gen3 High Performance Read Intensive SFF SCN U.2 P4510 SSD	P13697-B21
HPE 7.68TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07196-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 CD6 SSD	P20143-B21

Core Options

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 PE8010 SSD P19819-B21

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 PE8010 SSD P19821-B21

Mixed Use - NVMe - SFF - Solid State Drives

HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD P07179-B21

HPE 800GB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD P13668-B21

HPE 800GB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 CM6 SSD P20094-B21

HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD P25953-B21

HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 PE8030 SSD P19823-B21

HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 PE8030 SSD P19825-B21

HPE 1.6TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD P13699-B21

HPE 1.6TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD P13670-B21

HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 CM6 SSD P20096-B21

HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD P20203-B21

HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 PE8030 SSD P19827-B21

HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 PE8030 SSD P19829-B21

HPE 3.2TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD P13672-B21

HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 CM6 SSD P20098-B21

HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD P20205-B21

HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 PE8030 SSD P19831-B21

HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 PE8030 SSD P19833-B21

HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 CM6 SSD P20100-B21

HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD P20207-B21

HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 PE8030 SSD P19835-B21

HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 PE8030 SSD P19837-B21

HPE 3.2TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD P13701-B21

HPE 6.4TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD P13703-B21

HPE 6.4TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD P13674-B21

Write Intensive - NVMe - SFF - Solid State Drives

HPE 375GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD 878014-B21

HPE 750GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD P06952-B21

Read Intensive - M.2 - Solid State Drives

HPE 240GB SATA 6G Read Intensive M.2 2280 5300B SSD P19888-B21

HPE 480GB SATA 6G Read Intensive M.2 2280 5300P SSD P19890-B21

HPE 960GB SATA 6G Read Intensive M.2 2280 5300P SSD P19892-B21

HPE Dual 240GB SATA 6G Read Intensive M.2 to SFF SCM 5300B SSD Kit P19894-B21

HPE Dual 480GB SATA 6G Read Intensive M.2 to SFF SCM 5300P SSD Kit P19896-B21

Hard Drive Blank Kits

HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit 878783-B21

Notes: [This is a M.2 enablement standup card.](#)

HPE Large Form Factor Hard Drive Blank Kit 666986-B21

HPE Small Form Factor Hard Drive Blank Kit 666987-B21

Core Options

Hard Drive Kits

HPE DL38X Gen10 3LFF Rear SAS/SATA Drive Kit 826685-B21

Notes:

- This is supported in the LFF model only.
- 3 LFF rear drives will consume the 2nd riser expansion slot.

HPE DL385 Gen10 4 Large Form Factor Mid-Plane Hard Drive Carrier 882096-B21

Notes:

- Supported with both the 8 and 12 LFF model.
- With this mid-tray only single-wide (8.5-inch cards with connections or less) cards are supported.
- This drive does support hot-swap drives.
- This requires High Performance Fans (867810-B21).

HPE DL38X Gen10 2SFF Premium HDD Front NVMe or Front/Rear SAS/SATA Kit 826687-B21

Notes:

- HPE DL38X Gen10 High Performance Temperature Fan Kit (867810-B21).
- NVMe drives require the addition of an NVMe capable riser, or a 2P configuration and the NVMe cable 871827-B21 for the on boards NVMe connection.
- To maintain SATA compatibility with NVMe connections, the 3 POS cable (882100-B21) must be used as well.

HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit 826688-B21

Notes:

- Supports 2 SFF rear in Riser1 or 2 location - max 2 supported SFF model.
- Supports 2 SFF rear in Riser1 or 2 location in LFF model. Note is 3 LFF rear option is selected maximum of one in riser 1 location.
- Supports uFF drives.

HPE DL38X NVMe 8 Solid State Drive Express Bay Enablement Kit 826689-B21

Notes:

- This option provides support for up to 8 NVMe drives, and can be populated in all Boxes in the 8 SFF model.
- A maximum of 24 NVMe drives only are supported.
- This will require the HPE DL38X Gen10 4-port 8 NVMe SlimSAS Riser (867807-B21).
- For full 24 drive NVMe support this requires 3 risers; 1st (867807-B21), 2nd (873732-B21) & 3rd (867808-B21) and the on board NVMe connections with 2x NVMe cable (871827-B21).
- Supporting 24 NVMe limits I/O support to the ALOM slot.

HPE DL38X Gen10 Premium 6 SFF SAS/SATA + 2 NVMe or 8 SFF SAS/SATA Bay Kit 826690-B21

Notes:

- This option provides supports for up to 8 SAS/SATA SFF drives or a combination of 6 SATA/SATA and 2 NVMe drives in the same cage, and can be populated in all Boxes in the SFF model.
- For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations. **Notes:** For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) or the NVMe cable (871827-B21) with the on board NVMe connections me be used.
- NVMe drives require the addition of the High Performance Fan kit (867810-B21).

HPE DL38X Gen10 SFF Box1/2 Cage/Backplane Kit 826691-B21

Notes: Supports 8 SAS/SAFA SFF drives in Box 1 or 2 to a max of 24 SFF SAS/SATA front.

HPE DL38X Gen10 8LFF Front 2NVMe HDD Bay Kit 873781-B21

Notes:

- Supports 2 NVMe in the Universal Media bay (included) on the 8 LFF model.
- For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations.
- For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) is needed or the NVMe cable (871827-B21) with the on board NVMe connections may be used.
- NVMe drives require the addition of the High Performance Fan kit (867810-B21).

Hard Drive Kits

Core Options

HPE DL38X Gen10 8LFF Front 2SFF SAS/SATA HDD Kit 867805-B21

Notes: For 2 SFF SAS/SATA in UMB on 8 LFF model only.

Media Bay Kits

HPE DL385 Gen10 Universal Media Bay 882097-B21

Notes:

- The HPE DL385 Gen10 Universal Media bay provides front Display Port and 2xUSB 2.0; plus support for 2x SFF front drives or 2 NVMe front drives (826687-B21 and NVMe riser required see notes below) and ODD support (Not included); and can only be located in Box1 in either an 8 SFF or 8+8 SFF model.
- This is a SFF model option only.
- For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations.
- For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) is needed or the NVMe cable (871827-B21) with the on board NVMe connections may be used.

HPE Smart IO

Pensando Distributed Services Card (DSC)

Pensando Distributed Services Platform DSC-25 Enterprise 10/25Gb 2-port SFP28 Card P26966-B21

Notes: Each card instance requires one RTU license of Silver or Platinum software. In case of more than one adapter, RTU licenses doesn't need to be of the same part number.

Pensando DSP Silver Software Licenses

Pensando Distributed Services Platform Enterprise 1-year Renewal Subscription 24x7 Support E-RTU R6A06AAE

Pensando Distributed Services Platform Enterprise 3-year Subscription 24x7 Support E-RTU R6A07AAE

Pensando Distributed Services Platform Enterprise 4-year Subscription 24x7 Support E-RTU R6F68AAE

Pensando Distributed Services Platform Enterprise 5-year Subscription 24x7 Support E-RTU R6A08AAE

Pensando DSP Platinum Software Licenses

Pensando Distributed Services Platform Enterprise Pro 1-year Renewal Subscription 24x7 Support E-RTU R6A09AAE

Pensando Distributed Services Platform Enterprise Pro 3-year Subscription 24x7 Support E-RTU R6A10AAE

Pensando Distributed Services Platform Enterprise Pro 4-year Subscription 24x7 Support E-RTU R6F69AAE

Pensando Distributed Services Platform Enterprise Pro 5-year Subscription 24x7 Support E-RTU R6A11AAE

Pensando iLO Management Module

Pensando Distributed Services Platform for HPE iLO Sideband Management Adaptive LOM Module P26969-B21

HPE Networking

1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port BASE-T BCM5719 Adapter 647594-B21

HPE Ethernet 1Gb 4-port BASE-T I350-T4V2 Adapter 811546-B21

HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter 615732-B21

HPE Ethernet 1Gb 2-port BASE-T I350-T2V2 Adapter 652497-B21

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port BASE-T BCM57416 Adapter 813661-B21

Core Options

HPE Ethernet 10Gb 2-port BASE-T QL41401-A2G Adapter	867707-B21
HPE Ethernet 10Gb 2-port SFP+ QL41401-A2G Adapter	P08446-B21
HPE Ethernet 10Gb 2-port SFP+ X710-DA2 Adapter	727055-B21
HPE Ethernet 10Gb 2-port BASE-T X550-AT2 Adapter	817738-B21
HPE Ethernet 10Gb 2-port FLR-T X550-AT2 Adapter	817745-B21

25 Gigabit Ethernet adapters

HPE Ethernet 10/25Gb 2-port SFP28 BCM57414 Adapter	817718-B21
HPE Ethernet 10/25Gb 2-port SFP28 MCX4121A-ACUT Adapter	817753-B21
HPE Ethernet 10/25Gb 2-port SFP28 QL41401-A2G Adapter	867328-B21

Notes:

- The DL385 Gen10 ships with 4x 1 Gb Embedded (if equipped). It is not supported on new boards for 7xx2 series processors
- A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.
- Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: <https://www.hpe.com/us/en/product-catalog/servers/adapters/pip.models.hpe-storefabric-converged-network-adapters.4118472.html>

100 Gigabit Ethernet adapters

HPE Ethernet 100Gb 1-port QSFP28 MCX515A-CCAT Adapter	874253-B21
---	------------

200 Gigabit Ethernet adapters

HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe3 x16 MCX653105A-HDAT Adapter	P06154-B21
---	------------

FlexibleLOM adapters

HPE Ethernet 1Gb 4-port FLR-T BCM5719 Adapter	629135-B22
HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 Adapter	665240-B21
HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter	817721-B21
HPE FlexFabric 10Gb 4-port FLR-T 57840S Adapter	764302-B21
HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter	817709-B21
HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT Adapter	817749-B21
HPE Ethernet 10Gb 2-port FLR-SFP+ X710-DA2 Adapter	727054-B21
HPE Ethernet 10/25Gb 2-port FLR-SFP28 QL41401-A2G Converged Network Adapter	867334-B21

Notes:

- The DL385 Gen10 chassis ships with 4x 1 Gb embedded.(if equipped). It is not supported on new boards for 7xx2 series processors
- Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.
- Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:
- 622FLR-SFP28 adapters with FCoE used in conjunction with all Red Hat 7.x version OS's is not supported at this time

HPE InfiniBand

HPE InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter	879482-B21
HPE InfiniBand EDR 100Gb 1-port 841QSFP28 Adapter	872725-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter	872726-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter	825111-B21
HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe3 x16 MCX653105A-HDAT Adapter	P06154-B21
HPE InfiniBand HDR PCIe3 Auxiliary Card with 350mm Cable Kit	P06154-B23

Core Options

HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe3 x16 MCX653105A-ECAT Adapter	P06250-B21
HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe3 x16 MCX653106A-ECAT Adapter	P06251-B21

HPE I/O Expansion Options

For additional details on ProLiant DL Gen10 server risers please visit:

<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>

The Primary Riser shipping default in the chassis is a x8 FH, FL, x16 FH, FL and x8 FH, HL. For a Secondary/Tertiary riser the second processor is required.

HPE DL38X Gen10 x16/x16 Riser Kit	826694-B21
-----------------------------------	------------

Notes:

- Slot 1 or 2 in Primary or Secondary location.
- Supports Full Height and Full length cards.
- Bus width x16, x16, Connector Width x16, x16.

HPE DL Gen10 x8/x16/x8 Riser Kit	870548-B21
----------------------------------	------------

Notes:

- No M.2 support on this riser.
- Supports Full Height, Half- length cards; Full Height, Full-length cards and Full Height, Half- length cards.
- Bus width x8, x16, x8, Connector Width x8, x16, x8.

HPE DL38X Gen10 4-port 8 NVMe Primary SlimSAS Riser	867807-B21
---	------------

Notes:

- Riser supporting up to 8 NVMe drives in Primary location.
- This can be connected to an 8SFF NVMe drive cage in box 3.
- To achieve max 24 NVMe support, connect 8 NVMe drives to both the primary and secondary risers, 4 NVMe drives to the tertiary riser, and 4 NVMe drives the the on board connectors.

HPE DL Gen10 x16/x16 GPU Riser Kit	826704-B21
------------------------------------	------------

Notes:

- Primary or Secondary Riser, Connector in slot 2 & 3 for GPU support.
- Supports Full Height and Full length cards.
- Bus width x16, x16, Connector Width x16, x16.

HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit	826688-B21
---	------------

Notes:

- Premium bay supporting SFF SAS/SATA .
- Available in Primary or Secondary Riser location. **Notes:** Will leave 1 x16 Connector available in bottom slot.

HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser	867806-B21
--	------------

Notes:

- Supports NVMe drives in Primary or Secondary location.
- Supports Full Height and half-length cards.
- Bus width x8, x8, x8 Connector Width x8, x8, x8.

HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser	867808-B21
---	------------

Notes: Supports up to 4 NVMe drives in Tertiary location.

HPE DL38X Gen10 4-port 8 NVMe Secondary Slim SAS Riser	873732-B21
--	------------

Notes: Riser supporting up to 8 NVMe drives in Secondary location.

HPE DL38X Gen10 2 x8 PCIe Tertiary Riser Kit	875780-B21
--	------------

Notes: Supports 2x 8 slots in the Tertiary location.

HPE DL38X Gen10 x16 Tertiary Riser Kit	826700-B21
--	------------

Notes:

- Supports 1x 16 slot in the Tertiary location.
- Supports Full Height and full-length card.

Core Options

– Bus width x16 Connector Width x16.

– For additional details on ProLiant DL Gen10 server risers please visit:

<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>

Riser Information*									
Part number	Description	Riser position			Bus width (Gen3 lanes)			NVMe Direct Connect	
		Primary	Secondary	Tertiary	Top slot	Middle Slot	Bottom slot	Ports	Drive count
n/a	This is the default riser in the chassis	D	N	N	x8	x16	x8	-	-
870548-B21	HPE DL Gen10 x8/x16/x8 Riser Kit	D	O	N	x8	x16	x8	-	-
826704-B21	HPE DL Gen10 x16/x16 GPU Riser Kit	O	O	N	0	x16	x16	-	-
826694-B21	HPE DL38X Gen10 x16/x16 Riser Kit	O	O	N	x16	x16	0	-	-
867807-B21	HPE DL38X Gen10 4-port 8 NVMe Primary SlimSAS Riser	O	N	N	0	0	0	4	8
867808-B21	HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser	N	N	O	0	0	0	2	4
873732-B21	HPE DL38X Gen10 4-port 8 NVMe Secondary SlimSAS Riser	N	O	N	0	0	0	4	8
867806-B21	HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser	O	O	N	x8	x8	x8	1	2
871673-B21	HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS FIO Riser Kit	O	N	N	x8	x8	x8	1	2
826688-B21	HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit	O	O	N	0	0	x16	-	-
826700-B21	HPE DL38X Gen10 x16 Tertiary Riser Kit	N	N	O	X16	0	0	-	-
875780-B21	HPE DL38X Gen10 2 x8 PCIe Tertiary Riser Kit	N	N	O	X8	X8	0	-	-
871674-B21	HPE DL38X Gen10 Slot 1/2 x16/x16 FIO Riser Kit	O	N	N	x16	x16	0	-	-
871676-B21	HPE DL38X Gen10 x16/x16 GPU Slot2/3 FIO Riser Kit	O	N	N	0	x16	x16	-	-

Core Options

826685-B21	HPE DL38X Gen10 3LFF SAS/SATA Riser Kit	N	O	N	0	0	0	-	-
------------	---	---	---	---	---	---	---	---	---

Notes: Y = supported; D = default on Chassis; O = optional; N = not supported or slot/connector not present.

HPE Power Supplies

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865408-B21

Notes: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit 865438-B21

Notes: Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865414-B21

Notes: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit 865434-B21

Notes: Flex Slot -48VDC power supplies support power efficiency of up to 94%.

HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit 865428-B21

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 830272-B21

Notes:

- Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.
- Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).
- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/hppoweradvisor>.
- All power supplies in a server should match. Mixing Power Supplies is not supported.
- Option kits contain the specified power supply and a PDU IEC cable.
- 1600W power supplies only support high line voltage.
- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional HPE power cords.

HPE PCIe Workload Accelerator Options

HPE 750GB NVMe Gen3 x4 High Performance Low Latency Write Intensive AIC HHHL P4800X SSD 878038-B21

HPE 1.6TB NVMe Gen4 x8 High Performance Mixed Use AIC HHHL PM1735 SSD P26934-B21

HPE 1.6TB NVMe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card P10264-B21

HPE 3.2TB NVMe Gen4 x8 High Performance Mixed Use AIC HHHL PM1735 SSD P26936-B21

HPE Computation and Graphics Accelerators

NVIDIA Quadro RTX 6000 Graphics Accelerator for HPE R0Z45C

Notes:

- Max Qty=1 Doublewide GPU is allowed per riser
- This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-

Core Options

B21)

- This option IS NOT supported with 166W or higher Processors
- System memory restriction < 128 TB
- This GPU requires Pwr Cable Kit (871830-B21) to be selected
- Not supported on 12 LFF chassis

NVIDIA Quadro RTX 8000 Graphics Accelerator for HPE

R1F97C

Notes:

- Max Qty=1 Doublewide GPU is allowed per riser
- This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)
- This option IS NOT supported with 166W or higher Processors
- System memory restriction < 128 TB
- This GPU requires Pwr Cable Kit (871830-B21) to be selected
- Not supported on 12 LFF chassis

NVIDIA P40 24GB Computational Accelerator for HPE

Q0V80C

Notes:

- Max Qty=1 Doublewide GPU is allowed per riser
- This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)
- This option IS NOT supported with 166W or higher Processors
- System memory restriction < 128 TB
- This GPU requires Pwr Cable Kit (871829-B21) to be selected
- Not supported on 12 LFF chassis

NVIDIA M10 Quad GPU Module for HPE

Q0J62C

Notes:

- This option requires the High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)
- This option IS NOT supported with 166W or higher Processors
- System memory restriction < 1 TB
- Not supported on 12 LFF chassis
- This option requires Power Cable Kit (871828-B21)
- Max Qty=1 Doublewide GPU is allowed per riser
- Max Qty=2 of this GPU is allowed per server

NVIDIA T4 16GB Computational Accelerator for HPE

R0W29C

Notes:

- This option requires the High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)
- System memory restriction < 128 TB
- This option IS NOT supported on the 8LFF or 12LFF Model-Xs

HPE Cooling Options

HPE DL38X Gen10 High Performance Temperature Fan Kit

867810-B21

Notes:

- This kit is required for specific **Ambient temperature environments**, coming in 2H2017.
- High Performance fan kit consists of 6 fans, these will need to replace all the standard fans in the unit, and fill all 6 fan cages.
- The 12 LFF and 24 SFF models (including field upgrades to 24 SFF) will already include 6 High Performance fan kits.
- The High Performance fan kit is needed to support certain Passive GPGPU (Graphics cards) configurations; or ASHRAE operating environments.
- For elevated ambient temperature support please see: <http://www.hpe.com/servers/ashrae>.

Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

Embedded Management

HPE iLO Advanced

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A

HPE Converged Infrastructure Management Software

HPE OneView Standard 1yr 9x5 Support Flexible Quantity E-RTU	K6F98AAE
HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Track 1-server LTU	E5Y36A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView Upgrade from Insight Management 3yr 24x7 Support 1-server LTU	F6Q91A
HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO Advance including 3yr 24x7 Support Track 1-server LTU	E5Y40A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support Bundle Track 1-server LTU	E5Y44A
HPE OneView Upgrade from Insight Management including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y45AAE
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE

Notes: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be [downloaded](#).

HPE Security

HPE Gen10 2U Bezel Kit	867809-B21
HPE Bezel Lock Kit	875519-B21
HPE Gen10 Chassis Intrusion Detection Kit	867824-B21

Notes: This provides a physical connection from the chassis board and hood and detects any physical intrusion into the chassis, providing security during the entire supply chain process of shipping, receiving, distribution, and operation.

HPE Trusted Platform Module 2.0 Gen10 Option	864279-B21
--	------------

Notes:

- HPE Trusted Platform Module 2.0 option works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.
- HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM

Additional Options

module.

– There is a FIO setting to allow this TPM module to operate in a TPM 1.2 mode (872108-B21).

HPE Smart Array Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#)



HPE 96W Smart Storage Battery (up to 20 Devices) with 145mm Cable Kit

Notes: All performance RAID controllers are supported by the HPE Smart Storage Battery (P01366-B21), which supports multiple devices and is sold separately.

HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller	804338-B21
--	------------

Notes:

– Does not occupy a PCIe expansion slot and includes SmartCache license.
 – The P816i-a cable ships in the 12LFF chassis only.

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller	804331-B21
--	------------

Notes: Does not occupy a PCIe expansion slot.

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller	830824-B21
---	------------

HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller	804405-B21
---	------------

Essential RAID Controllers

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804394-B21
--	------------

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804398-B21
--	------------

HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller	804326-B21
---	------------

Notes: Does not occupy a PCIe expansion slot.

HPE Cable Options

HPE DL38X/560/580/ML350 Gen10 P824i-p Cable Kit	P00614-B21
HPE DL385 Gen10 Mini SAS 3POS Cable Kit	882100-B21

Additional Options

HPE DL38x Gen10 8-pin Cable Kit	871828-B21
HPE DL38x Gen10 8-pin Keyed Cable Kit	871829-B21
HPE DL38x GPU 6px6p Y-Power Cable Kit	874212-B21
HPE GPU 2x 8-pin Cable Kit	P03849-B21
HPE DL38x Gen10 8x 6-pin Cable Kit	871830-B21

HPE Disk-Based Backup

HPE RDX External Docking Station	C8S07B
HPE RDX 500GB Removable Disk Cartridge	Q2042A
HPE RDX 1TB Removable Disk Cartridge	Q2044A
HPE RDX 2TB Removable Disk Cartridge	Q2046A
HPE RDX 4TB Removable Disk Cartridge	Q2048A

HPE Racks

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
 - Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
 - Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
-

HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
 - Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
 - Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
 - Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
-

HPE Uninterruptible Power Systems (UPS)

To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

- Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
 - Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.
-

HPE Rack Options

Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

Rail Kits

Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

Additional Options

To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative (695539-001).

Notes: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

HPE 2U Small Form Factor Easy Install Rail Kit 733660-B21

Notes: Does not include CMA (733664-B21).

HPE 2U Large Form Factor Easy Install Rail Kit 733662-B21

Notes: Does not include CMA (733664-B21).

HPE 2U Cable Management Arm for Easy Install Rail Kit 733664-B21

HPE 2U Small Form Factor Ball Bearing Rail Kit 720863-B21

Notes: Does not include CMA (720865-B21).

HPE 2U Large Form Factor Ball Bearing Rail Kit 720864-B21

Notes: Does not include CMA (720865-B21).

HPE 2U Cable Management Arm for Ball Bearing Rail Kit 720865-B21

HPE Other Options

HPE Rack LED Light Kit BW939A

HPE Kit LCD 1.83m Latch Display Port Cable G7T29A

HPE USB and SD Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD RAID 1 USB Boot Drive P21868-B21

HPE 32GB microSD Flash Memory Card 700139-B21

HPE Support Services

Installation & Startup Services

HPE Install ProLiant DL38x(p) Service U4554E

HPE Installation and Startup DL38x(p) Service U4555E

Tech Care

HPE 5 Year Tech Care Essential DL385 Gen10 Service HV6C8E

HPE 5 Year Tech Care Essential wDMR DL385 Gen10 Service HV6D3E

HPE 3 Year Tech Care Essential DL385 Gen10 Service HV6C6E

HPE 3 Year Tech Care Essential wDMR DL385 Gen10 Service HV6D1E

Notes: For a full listing of Support Services available for this server, please visit <http://www.hpe.com/services>.


Memory





General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit:
- <http://www.hpe.com/docs/amd-population-rules>
- To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required.
- For additional information, please see the: [HPE DDR4 Smart Memory QuickSpecs](#)
- For details on the HPE Server Memory speed, visit: <http://www.hpe.com/docs/amd-speed-tables>


Storage

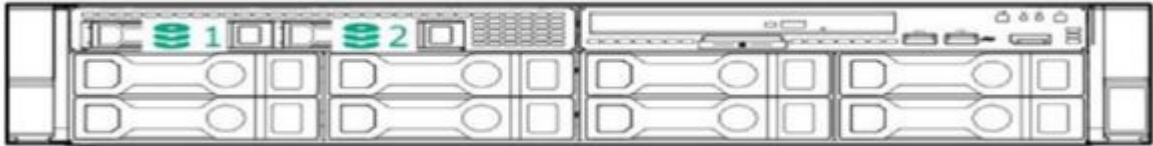

8LFF chassis with Universal media bay and optional 2SFF and optical drive shown

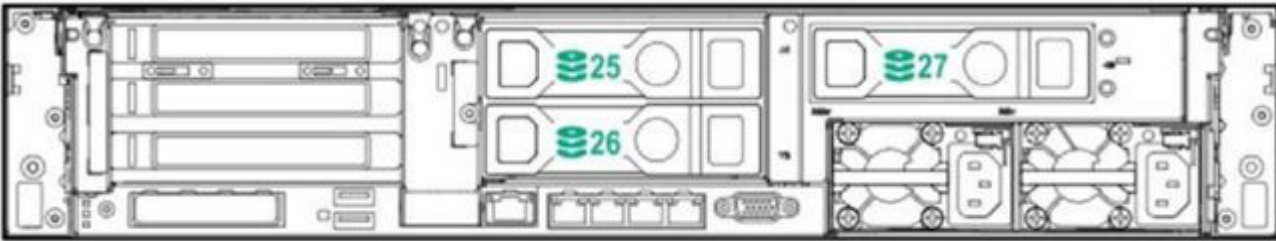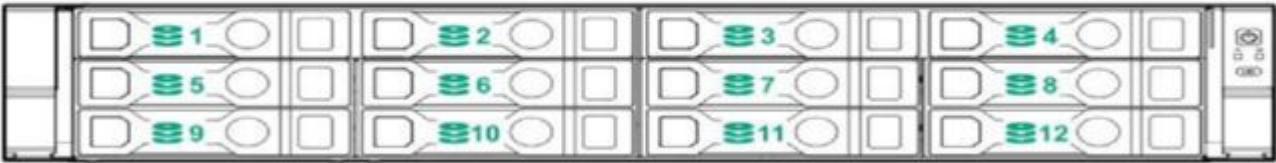


12 LFF + 3 rear LFF drives

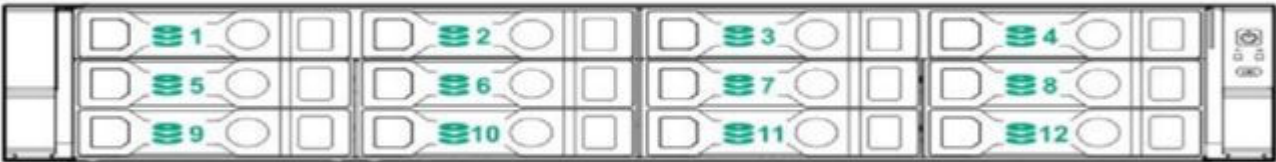


12 LFF + 2 rear SFF drives

Storage

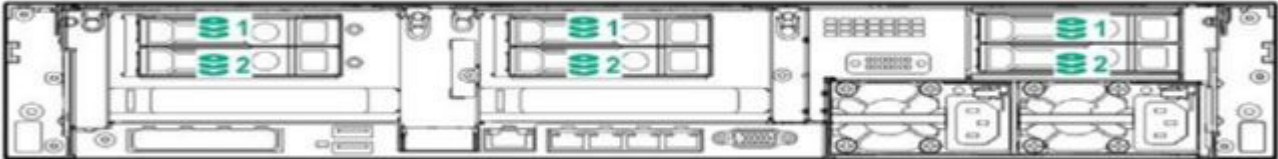

6 rear SFF drives

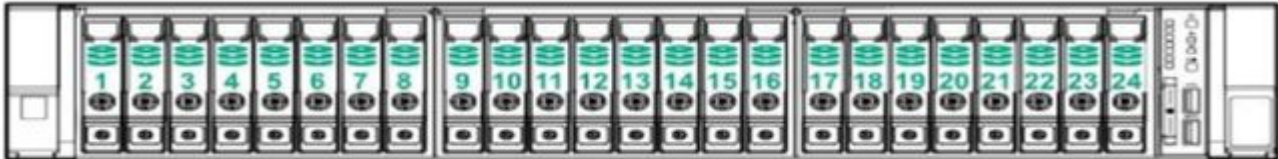

24 SFF + rear 2 SFF drives

Technical Specifications

System Unit

- **Dimensions**

- **SFF Drives**

- 8.73 x 44.55 x 67.94 cm

- 3.44 x 17.54 x 26.75 in

- **LFF Drives**

- 8.73 x 44.55 x 73.02 cm

- 3.44 x 17.54 x 28.75 in

- **Weight** (approximate)

- **Minimum**

- 8 SFF chassis with 1x SFF HDD and 7 HDD blanks, 2x Drive Bay blanks, 1x processor including standard heatsink, 1x power supply (plus blank), 1x Smart Array, 1x Riser installed, cables for the above)

- 14.9 kg**

- 32.75 lb**

- **Maximum**

- 12 LFF hard drives (no rear drives), 2x processors, 2x power supplies, 1x Smart Array, 2x Risers installed)

- 23.6 kg**

- 51.5 lb**

Input Requirements (per power supply)

- **Rated Line Voltage**

- 100 to 120 VAC

- 200 to 240 VAC

- **BTU Rating**

- Maximum**

- For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only

- For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only

Power Supply Output (per power supply)

- **Rated Steady-State Power**

- For 1400W Power Supply: 1400W (at 240 VAC), 1400W (at 240 VAC)

- For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only

- For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only

- **Maximum Peak Power**

- For 1400W Power Supply: 1400W (at 200 to 240 1VAC), 1400W (at 240 VAC) input for China only

- For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only

- For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only

Technical Specifications

System Inlet Temperature

- **Standard Operating Temperature**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

- **Extended Ambient Operating Temperature**

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:<http://www.hpe.com/servers/ashrae>

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:<http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity(non-condensing)

- **Operating**

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating**

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

- **Operating**

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

- **Non-operating**

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

RTC Accuracy

- 50 ppm

Technical Specifications

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Acoustic Noise	
Idle	
LWAd	4.8 B Entry 4.4 B Base 4.6 B Perf
LpAm	37 dBA Entry 31 dBA Base 31 dBA Perf
Operating	
LWAd	4.8 B Entry 4.4 B Base 4.6 B Perf
LpAm	37 dBA Entry 31 dBA Base 31 dBA Perf

Notes:

- Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.
- Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.
- The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

Emissions Classification (EMC) - Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

HPE Smart Array

For latest information on **HPE Smart Array Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers** please refer to their QuickSpecs. (E208i-a,E208i-p,E208e-p,P408i-a,P408i-p,P408e-p,P816i-a)

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett

Technical Specifications

Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
06-Apr-2021	Version 29	Changed	Service and Support and Additional Options sections were updated. Obsolete SKUs were removed.
01-Feb-2021	Version 28	Changed	Core Options section was updated. Obsolete SKUs were removed.
02-Nov-2020	Version 27	Changed	Standard Features, Pre-configured Models, Configuration Information and Core Options sections were updated. Obsolete SKUs were removed.
05-Oct-2020	Version 26	Changed	Core Options section was updated. Obsolete SKUs were removed.
08-Sep-2020	Version 25	Changed	Standard Features section was updated. Obsolete SKUs were removed.
03-Aug-2020	Version 24	Changed	Core Options section was updated. Obsolete SKUs were removed.
01-Jun-2020	Version 23	Changed	Pre-configured Models and Core Options sections were updated.
06-Apr-2020	Version 22	Changed	Standard Features, Configuration Information and Core Options sections were updated.
17-Feb-2020	Version 21	Changed	Overview, Configuration Information, Pre-configured Models and Standard Features sections were updated.
02-Dec-2019	Version 20	Changed	Standard Features, Configuration Information, Core Options and Additional Options sections were updated.
07-Oct-2019	Version 19	Changed	Overview, Standard Features, Pre-configured Models, Configuration Information, Core Options and Additional Options sections were updated. Obsolete SKU was removed.
03-Sep-2019	Version 18	Changed	Overview, Standard Features, Pre-configured Models, Configuration Information, Core Options, and Additional Options sections were updated. Obsolete SKU was removed.
26-Aug-2019	Version 17	Changed	Overview, Standard Features, Optional Features, Pre-configured Models, Core Options, Additional Options and Memory sections were updated. Obsolete SKUs were removed from the QuickSpecs.
05-Aug-2019	Version 16	Changed	Configuration Information - Factory Integrated Models and Core Options sections were updated. Obsolete SKU was removed.
03-Jun-2019	Version 15	Changed	Overview, Core Options, Additional Options, Pre-configured Models and Memory sections were updated. The U.S. version of QuickSpecs is no longer being updated, please reference the Worldwide QuickSpecs for latest information.
15-Apr-2019	Version 14	Changed	SKUs were updated.
02-Apr-2019	Version 13	Changed	Overview, Core Options, Additional Options and Standard Features sections were updated
04-Mar-2019	Version 12	Changed	Pre-configured Model and Additional Options sections were updated.

Summary of Changes

04-Feb-2019	Version 11	Changed	Overview, Standard Features, Pre-configured Models, Configuration Information, Core Options , Additional Options and Optional Features were updated
10-Dec-2018	Version 10	Changed	SKU 829335-B21 was deleted from Core Options Sectio
15-Oct-2018	Version 9	Changed	Overview, Standard Features, Pre-Configured models, Configuration Information - Factory Integrated Models, Core Options, Additional Options, Memory were revised.
Date	Version History	Action	Description of Change
01-Oct-2018	Version 8	Changed	Overview, Standard Features, Pre-Configured models, Configuration Information - Factory Integrated Models, Core Options, Additional Options, Memory were revised.
06-Aug-2018	Version 7	Changed	New Memory option and new GPU option were added. Added new Solid State Drives offering. Configuration Information - Factory Integrated Models, Core Options, and Additional Options were revised.
02-Jul-2018	Version 6	Changed	Core Options and Additional Options were revised.
04-Jun-2018	Version 5	Changed	Added new SSD offering. New GPU options and Riser information table were added. Core Options, Additional Options, and Memory were revised. Obsolete SKUs were removed from the QuickSpecs.
07-May-2018	Version 4	Changed	Added new Entry model to the Pre-Configured models section. Pre-Configured models, Configuration Information - Factory Integrated Models, Core Options, and Additional Options were revised.
02-Apr-2018	Version 3	Changed	SKU descripton were updated.
12-Feb-2018	Version 2	Changed	New model was added to the Pre-configured Models section. Overview, Expansion Slots, Maximum Internal Storage, Pre-configured Models, Configuration Information - Factory Integrated Models, Core Options, Additional Options, and Memory were revised. Obsolete SKUs were removed from the QuickSpecs.
04-Dec-2017	Version 1	New	New QuickSpecs.

Copyright

Make the right purchase decision. Contact our presales specialists.



Chat



Email



Call



© Copyright 2021 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

AMD® and EPYC® are registered trademarks of Advanced Micro Devices Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00026913enw - 16108 - Worldwide - V29 - 06-April-2021

